


Dear Partners:



Powertip is introducing a 8” model PH102600T019-IBC (with CTP) and PH102600T019-IBA (without CTP), ideal for a range of tasks, from medical device, smart home control, measure instrument to portable applications.

Featuring 20K MTBF with 360 nits / 420 nits, LVDS interface.

■ 8” DISPLAY With / Without CTP

Item	Description
Display Resolution	1024 * 3 (RGB) * 600 Dots
LCD type	a-Si TFT , Normally white , Transmissive type
Screen size (inch)	8.0 inch
Interface	LVDS
Drive IC	Source--- HX8282- A00DPD300 Gate----- HX8969- A01DPD300
Operating Temp.	-20 ~ +70 deg. C
Storage Temp.	-30 ~ +80 deg. C
Brightness	360 / 420 cd/m2
Life time	20000 hrs (25deg.C, IF= 200mA)
CTP IC	Goodix--GT928
Output Interface	I2C

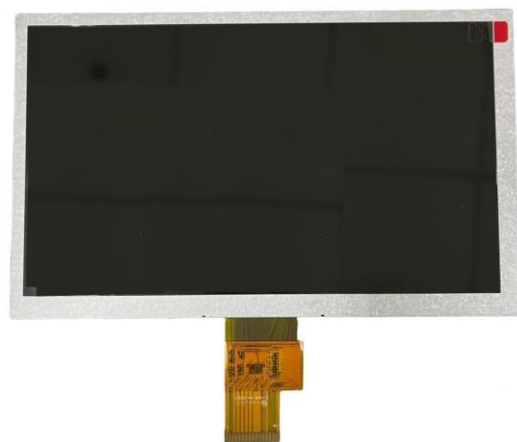

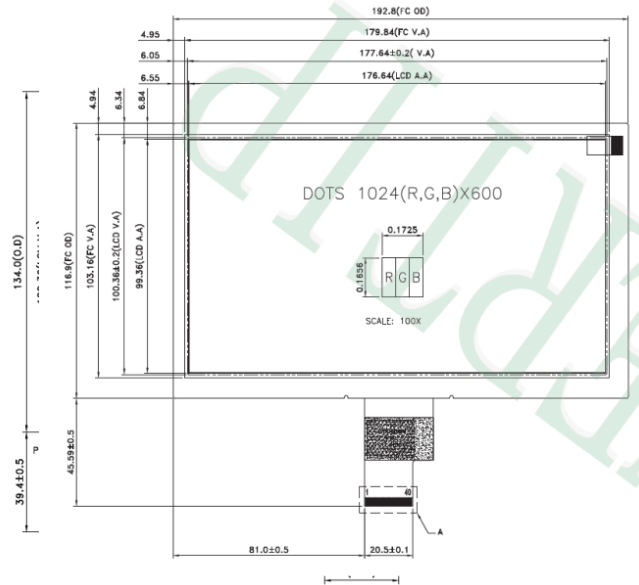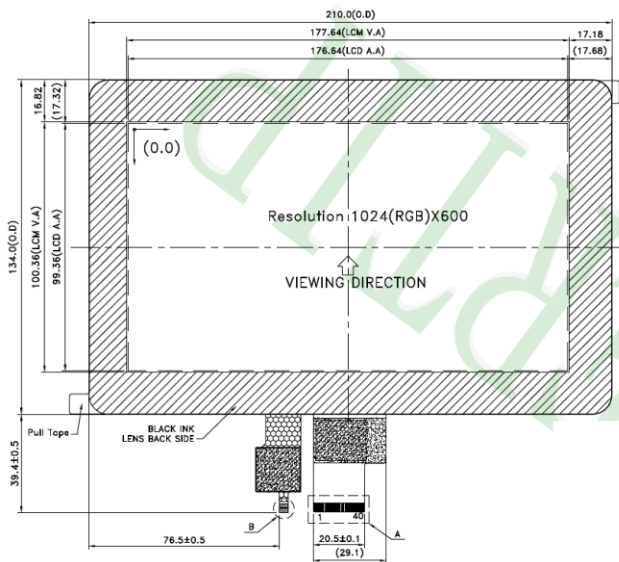

Application:
 Measure Instrument
 Portable Devices
 Smart Home Control
 Medical Device

