


Dear Partners:

Powertip is introducing bar type display PH480128T002-ZCR. Featuring RGB interface with OCA bonding, borderless CTP, 550 nits 50K MTBF.

Preferred application for outdoor industrial equipment, smart home control, dynamic information and home appliance

■ 3.9" PH480128T002-ZCR

Item	Description
Display Resolution	480 * 3 (RGB) * 128 Dots
LCD type	Full Viewing Angle, Normally Black, Transmissive type
Screen size (inch)	3.9 inch
Interface	Digital 24-bits RGB
Driver IC	ST7282A-G6-E4S (Or Compatible IC)
Operating Temp.	-20 ~ +70 deg. C
Storage Temp.	-30 ~ +80 deg. C
Brightness	550 cd/m2
Life time	50000 hrs (25deg.C)
Touch IC	GT911
Output Interface	I2C

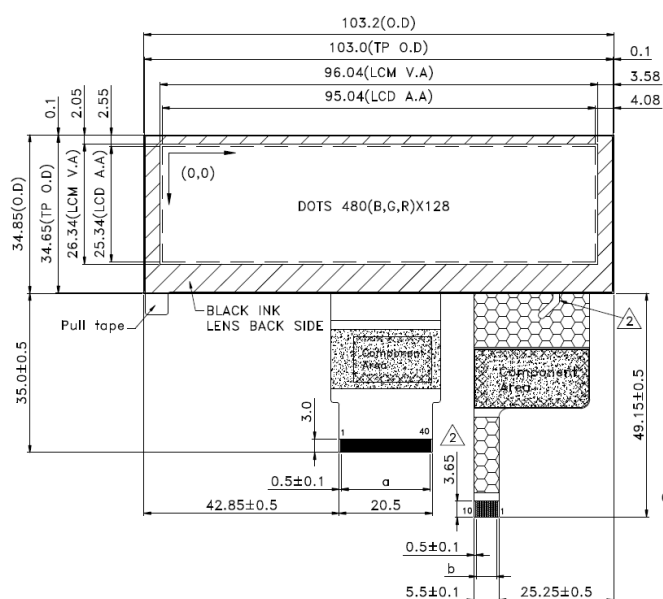

■ Application:

- Outdoor Industrial Equipment
- Vending Machine
- Monitoring Panel
- Power Management System
- Industrial Device

