

Dear Partners:


PowerTip is introducing a 2.8" IPS model PH240320T067-ZAR. Featuring SPI 4-LINE interface, QBGA, CTP and OCA bonding, 270 nits 20K MTBF.

Preferrable application for portable products, payment card reader, and home security.

Please visit our website to learn more about our products or contact with your sales representative for pricing and more information.

■ 2.8" PH240320T067-ZAR

Item	Description
Display Resolution	240 * 3 (RGB) * 320 Dots
LCD type	Full Viewing Angle, Normally Black, Transmissive type
Screen size (inch)	2.8 inch
Interface	SPI 4-LINE
Drive IC	ST7789T3-G4-1
Operating Temp.	-20 ~ +70 deg. C
Storage Temp.	-30 ~ +80 deg. C
Brightness	270 cd/m2
Life time	20000 hrs (25deg.C, IF= 80mA)
Touch IC	CHSC5816
Output Interface	I2C

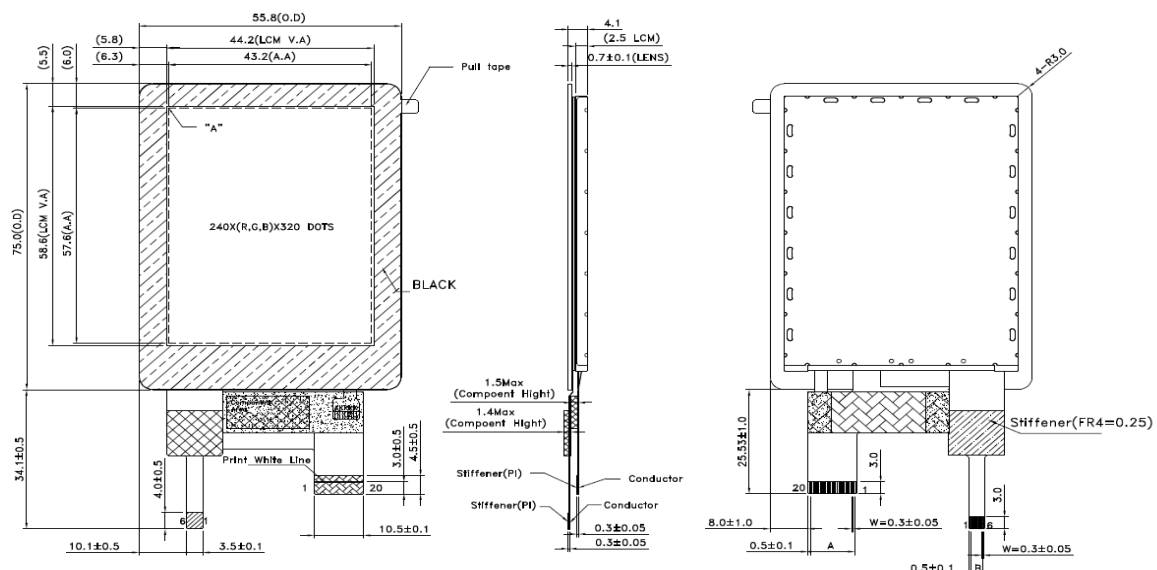

- Application:
 - Portable Products
 - Payment Card Reader
 - GPS Bike trackers
 - Home Security

