

Dear Partners:



PowerTip is introducing a 2.8" display PH240320T067-ZAA and PH240320T067-ZAR with CTP OCA bonding. Featuring IPS panel, SPI 4-LINE interface, from 220 to 300 nits 20K MTBF.

Preferrable application for access control system, home applications, card reader and measurement devices.

Please visit our website to learn more about our products or contact with your sales representative for pricing and more information.

■ 2.8" PH240320T067-ZAA and PH240320T067-ZAR with CTP OCA bonding

Item	Description	
Display Resolution	240 * 3 (RGB) * 320 Dots	
LCD type	Full Viewing Angle , Normally Black , Transmissive type	
Screen size (inch)	2.8 inch	
Optical Type	None	OCA
Interface	SPI 4-LINE	
Drive IC	ST7789T3-G4-1	
Operating Temp.	-20 ~ +70 deg. C	
Storage Temp.	-30 ~ +80 deg. C	
Brightness	300 cd/m2	270 cd/m2
Life time	20000 hrs (25deg.C, IF= 80mA)	

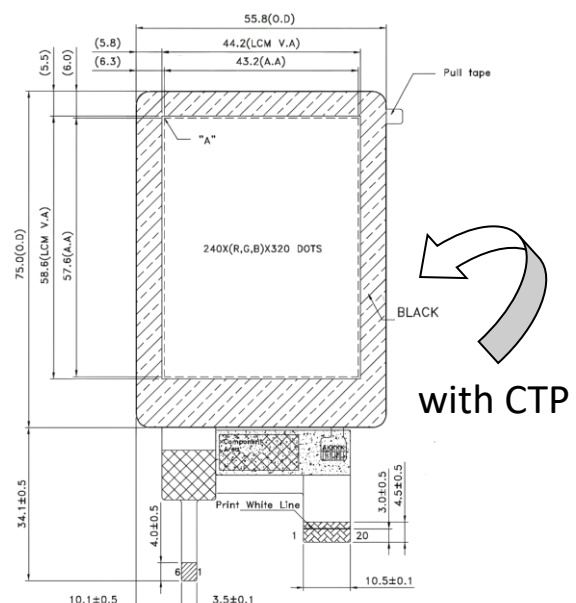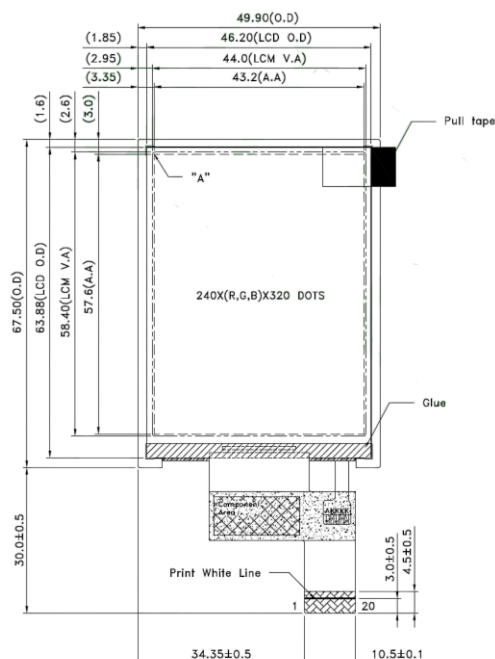

- Application:
 - Access Control System
 - Home Applications
 - Card Reader
 - Measurement Devices

